# Refrigerated 74" Display Case MODEL: DDC80



#### **Product features**

- Sliding glass, rear doors for effortless loading and unloading
- Double pane, curved, front glass which reduces heat transfer and promotes product conservation
- Fully adjustable stainless steel shelves
- Stainless steel floor
- Temperature range from 35.6°F to 50°F
- LED lighting for enhanced product display
- Easy-lift front covers for access to condensing unit and easy cleaning
- Electronic temperature controller
- Gravity controlled cooling system
- 1/3 HP compressor
- R134a refrigerant that reduces and optimizes energy consumption



#### **Available Product Finishes**




WHITE

STAINLESS

#### **Accessories**

Castors, Lock provided on front set for more security,
 Castors have a diameter of 4" (102mm).

#### **Product highlights**

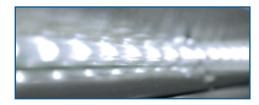

**LED Lighting** 



**Electronic Digital Controller** 



**Easy Access to Compressor** 

#### **Certifications**





### Warranty


- 2 Year parts and labor
- Additional 3 year compressor coverage


Residential: Assumes on liabillity for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

## PRODUCT SPECIFICATIONS MODEL: DDC80



#### **Plan view**

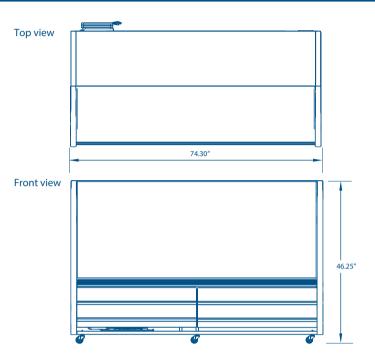



#### **Technical data**

#### **Dimensions**

External dimensions	W: 74.30" D: 34.21" H: 46.25"
Internal dimensions	W: 71" D: 28.75" H: 27.34"
Net volume	28 ft3 (792 Lts.)
Net weight	419 Lbs.
Gross weight	499 Lbs.
Upper shelf dimensions	W: 32.78" D: 15.12"
Lower shelf dimensions	W: 32.78" D: 19.06"

#### **Electrical data**

Side view

Power supply	115v/ 60 Hz
Amps	7.8 A
Length of cord	74.80" (1900mm)
Lighting	LED
Plug type	NEMA-5-15P
Controller	ERC 112
Compressor power	1/3 HP

#### **Performance data**

Refrigerant charge	21.87 oz
Energy consumption	6.71 KW/24HRS
Evaporator	Natural convection
Evaporation temperature	8.6°F (-13°C)
Expansion method	Capilar
Thawing method	Natural

#### Cooling

Temperature range	35.6°F to 50°F (Exhibition)
Refrigerant	R134a
Cut In	41°F (5°C)
Cut Out	33.8°F (1°C)
Condenser	Maintenance free

#### Construction

Exterior material	Stainless Steel, Black, White
Interior material	Stainless Steel
Number of shelf storage	4
Shelf material	Stainless Steel
Door type	Sliding glass door
Door quantity	2

#### Logistic data

Trailer Loads	16 fit on a 53' trailer
Trailer Loads	15 fit on a 48' trailer
Unit weight with packaging	419.76 lb
Dimensions with packaging	W: 81.25" D: 39" H: 51.75"

<sup>\*</sup> W= Width, D= Depth, H= Height