



|              |     |          |       |
|--------------|-----|----------|-------|
| PROJECT NAME |     | LOCATION | AIA # |
| ITEM #       | QTY | MODEL #  | SIS # |

# SPEC SERIES®

REACH-IN GLASS SWING DOOR HEATED CABINETS

|        |          |          |          |
|--------|----------|----------|----------|
| models | STR1H-1G | STA1H-1G | STG1H-1G |
|--------|----------|----------|----------|




| STR1H-1G        |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, front & sides.                            |
| <b>Interior</b> | Stainless steel side walls, back, floor, door liner, & ceiling. |
| <b>Shelving</b> | (1) Interior kit option included per full section.              |

| STA1H-1G        |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, front & sides.                            |
| <b>Interior</b> | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |
| <b>Shelving</b> | (3) Heavy duty, chrome plated, wire shelves per section.        |

| STG1H-1G        |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, with matching aluminum sides.             |
| <b>Interior</b> | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |
| <b>Shelving</b> | (3) Heavy duty, chrome plated, wire shelves per section.        |

## plan view

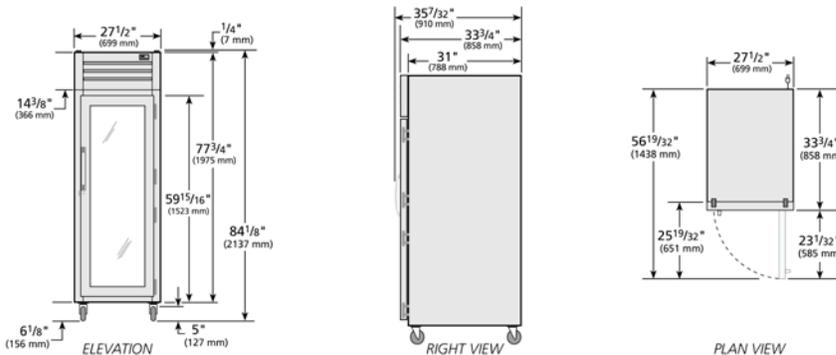

| SPECIFICATIONS   |              |                      |
|--|--------------|----------------------|
| Dimensions   | in.          | mm.                  |
| Length   | 27 1/2       | 699                  |
| Depth  | 33 3/4       | 858                  |
| Height   | 77 3/4       | 1975                 |
| <b>Electrical</b>  | <b>U.S.</b>  | <b>International</b> |
| Watts  | 1500         |                      |
| Voltage  | 208-230/60/1 |                      |
| NEMA   | 6-15P        |                      |
| Cord Length  | 9 ft.        | 2.74 M.              |
| 208-230/60/1<br>NEMA-6-15R   |              |                      |
| * Height does not include 6 1/8" (156 mm) for castors or 6" (153 mm) for optional legs. Height does not include 1/4" (7mm) for system mechanical components. |              |                      |

Specifications subject to change without notice.  
 Chart dimensions are rounded up to the nearest 1/8" (millimeters rounded up to the next whole number).

|      |                   |                     |
|------|-------------------|---------------------|
|      | <b>APPROVALS</b>  | <b>AVAILABLE AT</b> |
| 8/14 | Printed in U.S.A. |                     |



|              |          |         |
|--------------|----------|---------|
| PROJECT NAME | LOCATION | AIA #   |
| ITEM #       | QTY      | MODEL # |
|              |          | SIS #   |

# SPEC SERIES®

REACH-IN GLASS SWING DOOR HEATED CABINETS

|        |          |          |          |
|--------|----------|----------|----------|
| models | STR1H-1G | STA1H-1G | STG1H-1G |
|--------|----------|----------|----------|



## standard features

### HEATER SYSTEM

- Cabinet designed to provide holding temperatures of 140°F to 180°F (60°C to 82.2°C). Heating system controlled by exterior on/off switch and electronic temperature control.
- One (1) stainless steel (for corrosion resistance), heating element for uniform generation of electric heat. Cabinet comes with a total of 1500 watts.
- Equipped with low-velocity fans to assure even temperature distribution throughout the cabinet.
- Manually controlled vent located on top of the cabinet for positive humidity control.

### CABINET CONSTRUCTION

- Insulation - entire cabinet structure and solid door are foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- 5" (127 mm) diameter plate castors - locks provided on front set.

### DOOR

- "Low-E", double pane thermal insulated glass.
- Lifetime guaranteed bolt style door lock standard.
- Lifetime guaranteed heavy duty all metal working door handle.

- Positive seal self-closing door with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, four (4) per door section.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

### MODEL FEATURES

- Exterior digital temperature display, available with either °F or °C.
- Designed to hold warm baked or cooked food. Cabinet is not designed to heat ambient or cold product.
- NSF-4 compliant for open food product.

### ELECTRICAL

- True requires that a sole use circuit be dedicated for the unit.
- Unit completely pre-wired at factory and ready for final connection to a 208-230/60/1 Hz. single phase, 15 amp dedicated outlet. Cord and plug set included.

### OPTIONAL FEATURES/ ACCESSORIES

(upcharge & lead times may apply)

- 6" (153 mm) standard legs.
- 6" (153 mm) seismic/flanged legs.
- Additional shelves.
- Stainless back. (STR, STA, STG)

### SHELVING KIT OPTIONS

- STR series kits factory installed at no charge. STA & STG series kits field installed, upcharge applies, lead times may apply.

- Kit #1: Nine (9) sets of #1 type tray slides and pilasters (field installed), bottom support of one (1) 18"L x 26"D (458 mm x 661 mm) pan or two (2) 14"L x 18"D (356 mm x 458 mm) pans.
- Kit #2: One (1) set half-section #2 steel rod tray slides and pilasters (factory installed), rim support of one (1) 18"L x 26"D (458 mm x 661 mm) pan.
- Kit #3: Six (6) sets of universal type tray slides and pilasters (factory installed), bottom support of one (1) 18"L x 26"D (458 mm x 661 mm) pan, two (2) 14"L x 18"D (356 mm x 458 mm) pans or two (2) 12"L x 20"D (305 mm x 508 mm) pans.
- Kit #4: Three (3) chrome shelves 25"L x 27¾"D (635 mm x 705 mm). Four (4) shelf clips included per shelf and wall mounted pilasters (factory installed). Shelves adjustable on ½" (13 mm) increments.
- Stainless steel (electro polished) shelves to be used with Kit Option #4.
- Additional kit option components available individually. Upcharge applies.

#### WARRANTY\*

Three year warranty on all parts and labor and an additional 2 year warranty on compressor. (U.S.A. only)

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

\*RESIDENTIAL APPLICATIONS: TRUE assumes no liability for parts or labor coverage for component failure or other damages resulting from installation in non-commercial or residential applications.



| Model      | Elevation | Right | Plan | 3D | Back |
|------------|-----------|-------|------|----|------|
| ST( )1H-1G |           |       |      |    |      |