

REFRIGERATOR MANUFACTURER
Turbo air
 more durable, efficient, beautiful

4184 E. Conant St.
 Long Beach, CA 90808
 Tel. 310-900-1000
 Fax. 310-900-1077
www.turboairinc.com

| | |
|-----------------|-------|
| Project : | |
| Model # : | |
| Item # : | Qty : |
| Available W/H : | |
| Approval : | |

Glass Door Heated Cabinet

Reach-In
PRO Series

Model : PRO-77H-G

FEATURES & BENEFITS

■ **Digital temperature control & monitor system**

- Keep food products safe by maintaining constant temperatures.
- Alarm beeps when doors are not sealed.
- Early warning alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- Sensitive touch display.

■ **Ducted fan air distribution system**

Maintains temperature within the food zone

■ **On/Off switch**

ON/OFF switch is located on control panel

■ **All stainless steel cabinet construction**

The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

■ **Sturdy, clean stainless steel shelving**

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

■ **LED interior lighting**

Includes a U.S. patented dimming option, exclusively from Turbo Air. This feature reduces energy consumption by 3~5%.

■ **High-density polyurethane insulation**

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

■ **Full length glass doors with locks**

■ **Self-closing doors with stay open feature at 120 degrees**

■ **Heated cabinet holds 140°F ~ 180°F for the best in food preservation**

■ **Lifetime guaranteed heavy duty hinges and handles**



| Model | Swing Door | CU./FT. | #of Shelves | Wattage (W) | AMPS | Crated Weight (lbs.) | L x D x H † (inches) |
|------------------|------------|-------------|-------------|-------------|-----------|----------------------|-----------------------------|
| PRO-77H-G | 3 | 73.9 | 9 | 3000 | 15 | 728 | 77 3/4 x 33 7/8 x 78 |

Glass Door Heated Cabinet

Reach-In
PRO Series

Model : PRO-77H-G

| ELECTRICAL DATA | |
|----------------------------|------------------------------|
| Voltage | 208/115/60/1 |
| Plug Type | Ⓢ NEMA L14-20P |
| Full Load Amperes | 15 |
| Wattage(W) | 3000 |
| Feed Wires with Ground | 4 |
| Cord Length (ft.) | 8 |
| DIMENSIONAL DATA | |
| # of Doors | 3 |
| # of Racks Accepted | 3 |
| Net Capacity (cu. ft.) | 73.9 |
| Ext. Length Overall (in.) | 77 3/4 (1976mm) |
| Ext. Depth Overall (in.)* | 33 7/8 (860mm) |
| Ext. Height Overall (in.)† | 78 (1982mm) |
| Int. Length Overall (in.) | 68 1/4 (1735mm) |
| Int. Depth Overall (in.) | 27 5/8 (702mm) |
| Int. Height Overall (in.) | 58 3/4 (1493mm) |
| # of Shelves | 9 |
| Shelf Size (L x D) (in.) | 23 1/2 x 26 3/8 (Left/Right) |
| | 25 x 26 3/8 (Middle) |
| Net Weight (lbs.) | 660 |
| Gross Weight (lbs.) | 728 |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/4" for door handles.

† Height does not include 5" for caster height.

■ WARRANTY : 3 Year Parts and Labor Warranty

■ STANDARD FEATURES

- Door locks standard
- Standard 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design

** Lead time applies. Please contact your sales representative for more details to order.


■ OPTIONAL ACCESSORIES

- 5" caster, 1/2" diameter & 13 TPI:
M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: (L, R) H50R901700, (M) H77R801710
- Full door bun tray rack: TSP-2250
(each holds up to fifteen 18"L x 26"D sheet pans)
- Half door bun tray rack: TSP-2224
(each holds up to six 18"L x 26"D sheet pans-sold separately)
- Tray slides kits: TS23-N1LR(#1), TS23-N4LR(#4), TS23-UNLR-H(Universal), TS3-N1C(#1), TS3-N4C(#4), TS3-UNC-H(Universal)
- (1) Pair of #1 Tray Slides: H26R104460
- (1) Pair of Universal Tray Slides: H26R104470


Ver.20200421

PLAN VIEW

(unit : inch)

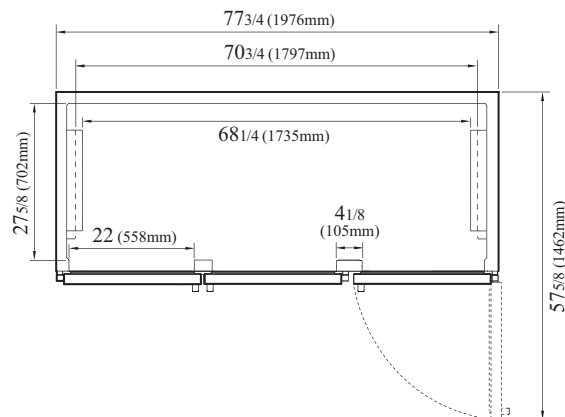

TOP VIEW

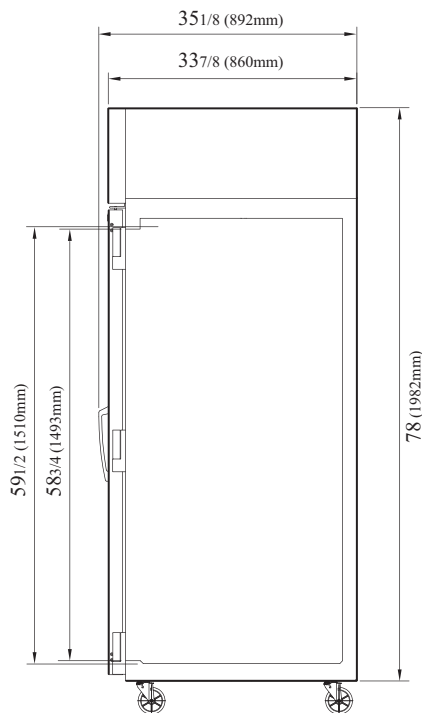

SIDE VIEW



- Turbo Air : 800-627-0032 ■ GK : 800-500-3519
- Warranty : 800-381-7770 ■ AC : 888-900-1002

REFRIGERATOR MANUFACTURER
Turbo air

REFRIGERATOR MANUFACTURER
GERMAN KNIFE

REFRIGERATOR MANUFACTURER
RADIANCE

REFRIGERATOR SYSTEM
Turbo air

REFRIGERATOR SYSTEM
texaking