

4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project :		
Model #:		
Item #:	Qty:	
Available W/H :		
Approval :		

# Solid Door Heated Cabinet

Reach-In PRO Series

**Model: PRO-77H** 

# \_\_\_ FEATURES & BENEFITS =\_\_

# ■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- · Alarm beeps when doors are not sealed.
- Early warning alarm program detects issues before malfunction occurs.
- · Digital display allows for easy monitoring.
- · Sensitive touch display.

## ■ Ducted fan air distribution system

Maintains temperature within the food zone

#### On/Off switch

ON/OFF switch is located on control panel

#### ■ All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

## ■ Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

## ■ LED interior lighting

#### ■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- Full length stainless steel solid doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime guaranteed heavy duty hinges and handles











PRO-77H	3	73.9	9	3000	15	695	773/4 x 337/8 x 78
Model	Swing Door	CU./FT.	#of Shelves	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D*x H† (inches)

(unit: inch)

# Model: PRO-77H

ELECTRICAL DATA				
Voltage	208/115/60/1			
Plug Type	③ NEMA L14-20P			
Full Load Amperes	15			
Wattage (W)	3000			
Feed Wires with Ground	4			
Cord Length (ft.)	8			
DIMENSIONAL DATA				
# of Doors	3			
# of Racks Accepted	3			
Net Capacity (cu. ft.)	73.9			
Ext. Length Overall (in.)	77 <sub>3/4</sub> (1976mm)			
Ext. Depth Overall (in.)*	337/8 (860mm)			
Ext. Height Overall (in.)†	78 (1982mm)			
Int. Length Overall (in.)	681/4 (1735mm)			
Int. Depth Overall (in.)	275/8 (702mm)			
Int. Height Overall (in.)	583/4 (1493mm)			
# of Shelves	9			
Chalf Cina /L v D) /in )	231/2 x 263/8 (Left/Right)			
Shelf Size (L x D) (in.)	25 x 263/8 (Middle)			
Net Weight (lbs.)	627			
Gross Weight (lbs.)	695			

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

#### ■ WARRANTY: 3 Year Parts and Labor Warranty


#### STANDARD FEATURES


- · Door locks standard
- Standard 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design
- \*\* Lead time applies. Please contact your sales representative for more details to order.

#### ■ OPTIONAL ACCESSORIES

- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: (L, R) H50R901700, (M) H77R801710
- Half door bun tray rack: TSP-2224
- (each holds up to six 18"L x 26"D sheet pans-sold separately)
- Full door bun tray rack: TSP-2250
- (each holds up to fifteen 18"L x 26"D sheet pans)
- Tray slides kits: TS23-N1LR(#1), TS23-N4LR(#4), TS23-UNLR-H(Universal), TS3-N1C(#1), TS3-N4C(#4), TS3-UNC-H(Universal)
- (1) Pair of #1 Tray Slides: H26R104460
- (1) Pair of Universal Tray Slides: H26R104470

**PLAN VIEW** 



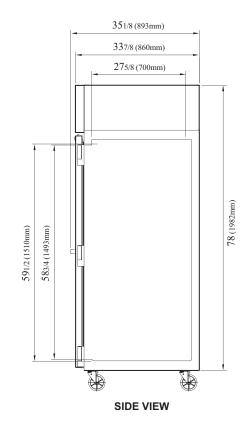

Ver.20200420

















■ Warranty: 800-381-7770



**AC**: 888-900-1002

■ **Turbo Air**: 800-627-0032 ■ **GK**: 800-500-3519

<sup>\*</sup> Depth does not include 1-1/4" for door handles.

<sup>†</sup> Height does not include 5" for caster height.