

REFRIGERATOR MANUFACTURER
Turbo air
 more durable, efficient, beautiful

4184 E. Conant St.
 Long Beach, CA 90808
 Tel. 310-900-1000
 Fax. 310-900-1077
www.turboairinc.com

Project :	
Model # :	
Item # :	Qty :
Available W/H :	
Approval :	

Roll-Through Glass Door Heated Cabinet *Roll-Through PRO Series*

Model : PRO-50H-G-RT

≡ FEATURES & BENEFITS ≡

- **Digital temperature control & monitor system**
 - Keep food products safe by maintaining constant temperatures.
 - Alarm beeps when doors are not sealed.
 - Early warning alarm program detects issues before malfunction occurs.
 - Digital display allows for easy monitoring.
 - Sensitive touch display.
- **Ducted fan air distribution system**
 Maintains temperature within the food zone
- **On/Off switch**
 ON/OFF switch is located on control panel
- **All stainless steel cabinet construction**
 The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.
- **High-density polyurethane insulation**
 The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- **LED interior lighting**
 Includes a U.S. patented dimming option, exclusively from Turbo Air. This feature reduces energy consumption by 3~5%.
- **Full length stainless steel solid doors with glass window**
- **Self-closing doors with stay open feature at 120 degrees**
- **Heated cabinet holds 140°F ~ 180°F for the best in food preservation**
- **Lifetime guaranteed heavy duty hinges and handles**



Model	Swing Door	CU./FT.	#of Rack Accepted	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D [*] x H [†] (inches)
PRO-50H-G-RT	2	80.82	2	3000	15	874	667/8 x 401/8 x 841/4

Roll-Through Glass Door Heated Cabinet

Roll-Through
PRO Series

Model : PRO-50H-G-RT

ELECTRICAL DATA	
Voltage	208/115/60/1
Plug Type	☺ NEMA L14-20P
Full Load Amperes	15
Wattage (W)	3000
Feed Wires with Ground	4
Cord Length (ft.)	8
DIMENSIONAL DATA	
# of Doors	2
# of Racks Accepted	2
Net Capacity (cu. ft.)	80.82
Ext. Length Overall (in.)	66 ⁷ / ₈ (1700mm)
Ext. Depth Overall (in.)	40 ¹ / ₈ (1020mm)
Ext. Height Overall (in.)*	84 ¹ / ₄ (2140mm)
Int. Length Overall (in.)	58 (1474mm)
Int. Depth Overall (in.)	35 ³ / ₈ (900mm)
Int. Height Overall (in.)	66 ⁷ / ₈ (1699mm)
Rack Size (L x D x H) (in.)	27 x 29 x 66
Net Weight (lbs.)	722
Gross Weight (lbs.)	874

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/4" for door handles. Depth does not include 5-1/2" for ramp.

■ WARRANTY : 3 Year Parts and Labor Warranty


■ STANDARD FEATURES

- Door locks standard
- Solid and sturdy grille design
- Heavy duty stainless steel ramp standard


** Lead time applies. Please contact your sales representative for more details to order.

PLAN VIEW

(unit : inch)

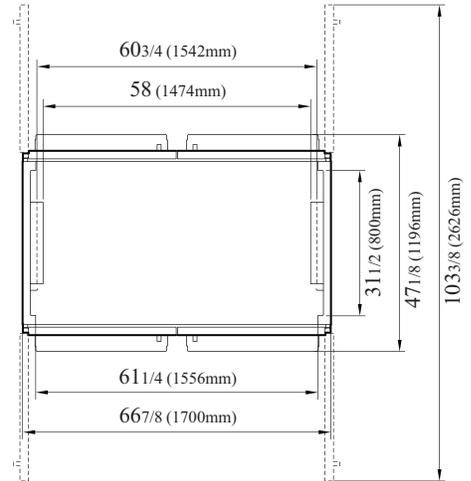

TOP VIEW

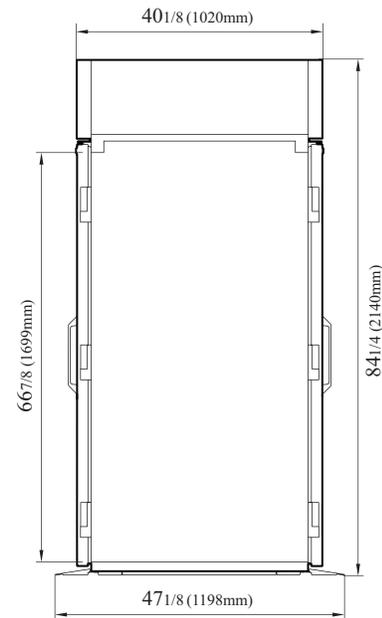

SIDE VIEW

Ver.20200720



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

REFRIGERATOR MANUFACTURER
Turbo air

GERMAN
KNIFE

||| **RADIANCE**

REFRIGERATION SYSTEM
Turbo air

TEXAKING