REFRIGERATED 40" DISPLAY CASE MODEL: DDC40



Product features

- Left hinge swing, glass rear door for effortless loading and unloading
- Double pane, curved, front glass which reduces heat transfer and promotes product conservation
- Fully adjustable stainless steel shelves
- Stainless steel floor
- Temperature range 35.6°F to 50°F
- LED lighting for enhanced product display
- Easy-lift front covers for access to condensing unit and easy cleaning
- Electronic temperature controller
- Gravity controlled cooling system
- 1/4 HP compressor
- R134a refrigerant that reduces and optimizes energy consumption



Available Product Finishes







Accessories

Castors, Lock provided on front set for more security,
 Castors have a diameter of 4" (102mm).

Product highlights



LED Lighting



Electronic digital controller



Easy access to compressor

Certifications





Warranty


- 2 Year parts and labor
- Additional 3 year compressor coverage

Residential: Assumes on liabillity for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

MODEL: DDC40



Plan view

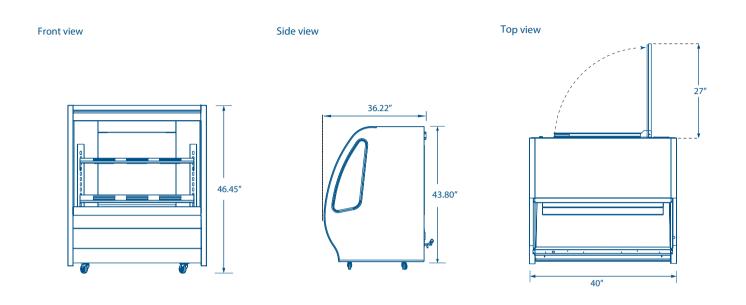

Technical data

Dimensions

| External dimensions | W: 40" D: 36.22" H: 46.45" |
|----------------------------|-------------------------------|
| Internal dimensions | W: 36.69" D: 28.81" H: 31.92" |
| Net volume | 14 ft3 (396 Lts.) |
| Net weight | 273 Lbs. |
| Gross weight | 343.9 Lbs. |
| Upper shelf dimensions | W: 32.6" D: 15.1" |
| Lower shelf dimensions | W: 32.6" D: 18.8" |

Performance data

| Refrigerant charge | 7.05 oz |
|--------------------------------|--------------------|
| Energy consumption | 4.93 KW/24HRS |
| Evaporator | Natural convection |
| Evaporation temperature | 8.6°F (-13°C) |
| Expansion method | Capilar |
| Thawing method | Natural |

Construction

| Exterior material | Stainless Steel,Black, White |
|-------------------------|------------------------------|
| Interior material | Stainless Steel |
| Number of shelf storage | 2 |
| Shelf material | Stainless Steel |
| Door type | Glass door swing |
| Door quantity | 1 |

Electrical data

| Power supply | 115v/ 60 Hz |
|------------------|-----------------|
| Amps | 6.96 A |
| Length of cord | 74.80" (1900mm) |
| Lighting | LED |
| Plug type | NEMA-5-15P |
| Controller | ERC 112D |
| Compressor power | 1/4 HP |

Cooling

| Temperature range | 35.6°F to 50°F (Exhibition) |
|-------------------|-----------------------------|
| Refrigerant | R134a |
| Cut In | 41°F (5°C) |
| Cut Out | 33.8°F (1°C) |
| Condenser | Maintenance free |
| | |

Logistic data

| Trailer Loads | 30 fit on a 53' trailer |
|----------------------------|----------------------------|
| Trailer Loads | 28 fit on a 48′ trailer |
| Unit weight with packaging | 343.92 lbs (156 kg) |
| Dimensions with packaging | W: 42.12" D: 37" H: 52.12" |
| | |
| | |

^{*} W= Width, D= Depth, H= Height