

REFRIGERATOR MANUFACTURER
Turbo air
 more durable, efficient, beautiful

4184 E. Conant St.
 Long Beach, CA 90808
 Tel. 310-900-1000
 Fax. 310-900-1077
www.turboairinc.com

Project :

Model # :

Item # :

Qty :

Available W/H :

Approval :

Glass Door Heated Cabinet

Reach-In
PRO Series

FEATURES & BENEFITS

Model : PRO-15H-G

■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarm beeps when doors are not sealed.
- Early warning alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- Sensitive touch display.

■ Ducted fan air distribution system

Maintains temperature within the food zone

■ On/Off switch

ON/OFF switch is located on control panel

■ All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

■ Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

■ LED interior lighting

Includes a U.S. patented dimming option, exclusively from Turbo Air. This feature reduces energy consumption by 3~5%.

■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

■ Full length glass doors with locks

■ Self-closing doors with stay open feature at 120 degrees

■ Heated cabinet holds 140°F ~ 180°F for the best in food preservation

■ Lifetime guaranteed heavy duty hinges and handles



Model	Swing Door	CU./FT.	#of Shelves	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D* x H† (inches)
PRO-15H-G	1	14.65	3	950	8.5	174	17 3/4 x 34 3/8 x 78

Glass Door Heated Cabinet

Reach-In
PRO Series

Model : PRO-15H-G

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	Ⓜ NEMA 5-15P
Full Load Amperes	8.5
Wattage (W)	950
Feed Wires with Ground	3
Cord Length (ft.)	8
DIMENSIONAL DATA	
# of Doors	1
# of Racks Accepted	-
Net Capacity (cu. ft.)	14.65
Ext. Length Overall (in.)	17 3/4 (451mm)
Ext. Depth Overall (in.)*	34 3/8 (872mm)
Ext. Height Overall (in.)†	78 (1980mm)
Int. Length Overall (in.)	13 3/4 (350mm)
Int. Depth Overall (in.)	25 3/8 (643mm)
Int. Height Overall (in.)	58 3/4 (1493mm)
# of Shelves	3
Shelf Size (L x D) (in.)	12 1/2 x 25
Net Weight (lbs.)	150
Gross Weight (lbs.)	174

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-3/8" for door handles.

† Height does not include 5" for caster height.

■ WARRANTY : 3 Year Parts and Labor Warranty

■ STANDARD FEATURES

- Door locks standard
- Standard 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design


** Lead time applies. Please contact your sales representative for more details to order.

■ OPTIONAL ACCESSORIES


- 5" caster, 1/2" diameter & 13 TPI:
M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: H15R915080

PLAN VIEW

(unit : inch)

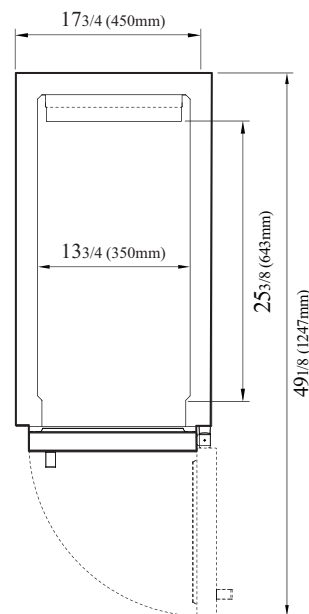

TOP VIEW

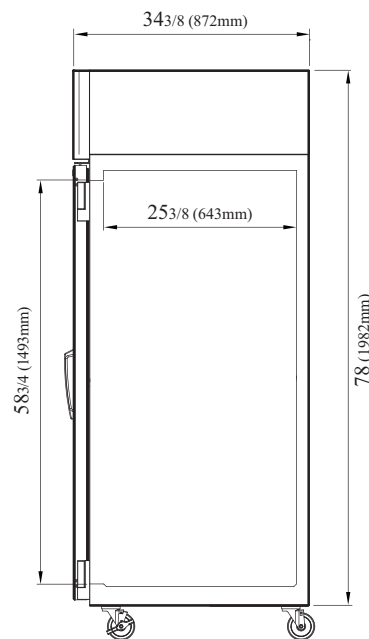

SIDE VIEW

Ver.20200518



- Turbo Air : 800-627-0032 ■ GK : 800-500-3519
- Warranty : 800-381-7770 ■ AC : 888-900-1002

REFRIGERATOR MANUFACTURER
Turbo air

GERMAN
KNIFE

||| **radiance**

REFRIGERATION SYSTEM
Turbo air

Texaking