

**REFRIGERATOR MANUFACTURER**  
**Turbo air**  
 more durable, efficient, beautiful

4184 E. Conant St.  
 Long Beach, CA 90808  
 Tel. 310-900-1000  
 Fax. 310-900-1077  
[www.turboairinc.com](http://www.turboairinc.com)

Project :

Model # :

Item # :

Qty :

Available W/H :

Approval :

## Roll-Thru Solid Heated Cabinet

Roll-Thru  
**PRO Series**

**Model : PRO-26H-RT(-L)  
 PRO-26H2-RT(-L)**

### FEATURES & BENEFITS

- **Digital temperature control & monitor system**
    - Keep food products safe by maintaining constant temperatures.
    - Alarm beeps when doors are not sealed.
    - Early warning alarm program detects issues before malfunction occurs.
    - Digital display allows for easy monitoring.
    - Sensitive touch display.
  - **Ducted fan air distribution system**  
 Maintains temperature within the food zone
  - **On/Off switch**  
 ON/OFF switch is located on control panel
  - **All stainless steel cabinet construction**  
 The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.
  - **High-density polyurethane insulation**  
 The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
  - **LED interior lighting**
  - **Full length stainless steel solid doors with locks**
  - **Self-closing doors with stay open feature at 120 degrees**
  - **Heated cabinet holds 140°F ~ 180°F for the best in food preservation**
  - **Lifetime guaranteed heavy duty hinges and handles**
- PRO-26H-RT: Right hinged, 115V
  - PRO-26H-RT-L: Left hinged, 115V
  - PRO-26H2-RT: Right hinged, 208V
  - PRO-26H2-RT-L: Left hinged, 208V



Model	Swing Doors	CU./FT.	#of Rack Accepted	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D x H (inches)
PRO-26H-RT(-L) PRO-26H2-RT(-L)	2	38.02	1	1550	13.5 7.5	461	34 x 40 1/8 x 84 1/4

# Roll-Thru Solid Heated Cabinet

Roll-In Thru  
PRO Series

## Model : PRO-26H-RT(-L) PRO-26H2-RT(-L)

ELECTRICAL DATA	PRO-26H-RT(-L)	PRO-26H2-RT(-L)
Voltage	115/60/1	208/115/60/1
Plug Type	☺ NEMA 5-15P	☺ NEMA L14-20P
Full Load Amperes	13.5	7.5
Wattage (W)	1550	1550
Feed Wires with Ground	3	4
Cord Length (ft.)	8	8
DIMENSIONAL DATA		
# of Doors	2	2
# of Racks Accepted	1	1
Net Capacity (cu. ft.)	38.02	38.02
Ext. Length Overall (in.)	34 (865mm)	34 (865mm)
Ext. Depth Overall (in.)*	40 1/8 (1020mm)	40 1/8 (1020mm)
Ext. Height Overall (in.)	84 1/4 (2140mm)	84 1/4 (2140mm)
Int. Length Overall (in.)	27 5/8 (701mm)	27 5/8 (701mm)
Int. Depth Overall (in.)	31 1/2 (800mm)	31 1/2 (800mm)
Int. Height Overall (in.)	66 7/8 (1699mm)	66 7/8 (1699mm)
Rack Size (L x D x H) (in.)	27 x 29 x 66	27 x 29 x 66
Net Weight (lbs.)	361	361
Gross Weight (lbs.)	461	461

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 2-1/2" for door handles. Depth does not include 7" for ramps.

### ■ WARRANTY : 3 Year Parts and Labor Warranty


### ■ STANDARD FEATURES

- Door locks standard
- Solid and sturdy grille design
- Heavy duty stainless steel ramp standard


\*\* Lead time applies. Please contact your sales representative for more details to order.

## PLAN VIEW

(unit : inch)

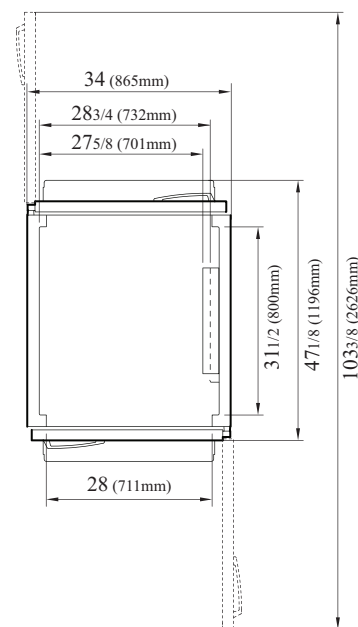

TOP VIEW

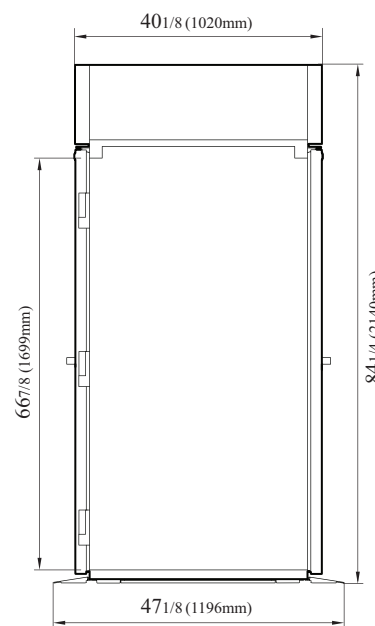

SIDE VIEW

Ver.20200721



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

REFRIGERATOR MANUFACTURER  
**Turbo air**

REFRIGERATION SYSTEM  
**GERMAN KNIFE**

REFRIGERATION SYSTEM  
**RADIANCE**

REFRIGERATION SYSTEM  
**Turbo air**

REFRIGERATION SYSTEM  
**TEXAKING**